

BÜFA

Composites

DIAMOND TOOLS FOR COMPOSITES

2025

DESIGN
MANUFACTURE
SUPPLY



DIAMOND TOOLING
SETTING THE STANDARD
WORLDWIDE

BÜFA Composites Nordics OY

Kalevankatu 6, 3. krs, 00100 Helsinki
email: nordicsales@buefa.de
web: www.buefa.ee
Finland: +358 505 367 733
Sweden/Norway: +46 70 307 4432

BÜFA Composites Baltic OÜ

Kõrtsi tee 9, 75306 Lehmja
email office@buefa.ee
Web: www.buefa.ee
Estonia: +372 5388 2295
Latvia/Lithuania: +370 614 95 949

Our Premium Partnership for your Production: BÜFA Composites & Diamond Tooling



BÜFA Composites Nordics OY
Kalevankatu 6, 3. krs, 00100 Helsinki
Email: nordicsales@buefa.de
Web: www.buefa.de
Finland: +358 505 367 733
Sweden/Norway: +46 70 307 4432

BÜFA Composites Baltic OÜ
Kõrtsi tee 9, 75306 Lehmja
Email: office@buefa.ee
Web: www.buefa.ee
Estonia: +372 5388 2295
Latvia/Lithuania: +370 614 95 949

PRODUCT INDEX

A - B - C		Page No	Electroflex Pads		14
ACCESSORIES		22	F - G - H		Page No
AS70 Angle Saw Machine	19		Fein Multimaster MM 700		21
AS100 Angle Grinder	20		Fein Triangular Pads		14
AS100 Angle Saw Machine	20		GRINDING		10 - 15
AS125 Angle Saw Machine	20		Groove Wheel		16
Air Belt Polisher	21		GRP/GRE Pipe Tools		16
Air Powered Machines	18 - 21		Gulleted Saw		1
Bandsaw Blades	3		Hand Files (Electroflex)		12
Blades	1 - 3		HAND MACHINES		18 - 21
Boring, Multi-Bore	6		Hand Pads		13
Calibration Drums	16		Hi Di Routers		9
Chamfer Rings	16		Holesaws		4
Chamfer Wheel	16		Holesaw Arbors		4
Continuous Rimmed Saw	1, 3				
Core Drills	5		I - J - K		
Corrugated Toothed Saw	2		Integral Spindle Saws		3
Countersinks	7		Jigsaw Blades		3
CUTTING	1 - 3		Jig Trimming Guide, SE20		18
D			L - M - N		
Dia Dry Discs	10		M14 Backed Discs		15
Diagrit Water Chucks	5		M14 Drums		14
Dia Met Hand Pads	13		Mandrels, D-Loc		15
Diamond Step Pro Drill	6		Metal Bond Core Drills		5
D-Loc Discs	15		Multi-Bore Tools		6
Dome Ended Routers	8		Narrow Belts		14
Drill Countersinks	7		Needle Files		12
DRILLING	4- 7				
			O - P		
E			Oil Mist Lubricator		22
Electroflex Belts	14		Oscillating Blades		3
Electroflex Discs	15		Parallel Routers		8
Electroflex Drums	14		Pendulum Blade		3
Electroflex Hand Files	12		Piercing Routers		9
Electroflex Hand Pads	13		Plastic Wedges		22
			Pneumatic Wet Polisher		19
			Pyramid Saws		2

PRODUCT INDEX

	Page No
Q	
Q-6R Pneumatic Machine	19
QRS Backing Discs	15
R - S	
Rebating Attachment, SE20	18
Re-dress Service	23
ROUTING	8 - 9
Routing Machine	18 - 19
Saws	1 - 3
Side Spoke Saws	1
SE20 Machine	18
SE50 Machine	19
Serrated Edged Saw	2
Special Tools	16 - 17
Spindle Saws	2


S (cont'd)	
Spindle Arbors	2
Stop Wheel	16
Strip & Re-plate Service	23
Surface Planers	11, 17
T	
Technical Specifications	24 - 25
Titan Dry Grinding Discs	10
Trimming Machine	18
U - V	
Vortex Cutters	11
W-X-Y-Z	
Water Chucks	5
Wedges	22
Wind Turbine	17

CUTTING

DIAMOND SAWS FOR THE COMPOSITES INDUSTRY

As one of the world leaders in diamond blade technology we are pleased to offer a complete range of high quality diamond blades for the Composites Industry.

We offer the majority of our blades from stock but we also have the ability to manufacture a diamond blade to your specifications/requirements.

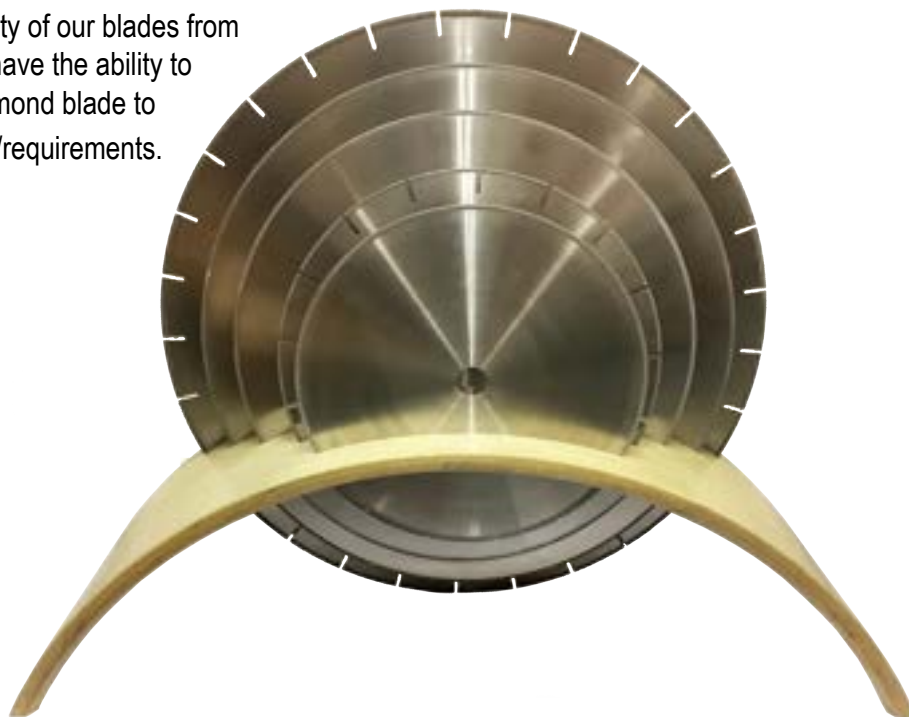

CONTINUOUS RIM SAWS

For fast straight cutting of materials. Can be used in hand tools or on stationary machines at speeds between 1500 and 3000 surface metres per minute.

OPTIONS: Diameters 25 - 700mm

NOTE:

Can be supplied in a variety of diamond grades and widths. Normally saws over 40mm diameter are coated with 3mm down the sides and the larger saws have a deeper coating. Saws are made with bore sizes to suit customers' requirements which should be stated on order.



SIDE SPOKE SAWS

This design allows the blade to cut curves without jamming or stalling the machine.

OPTIONS: Diameters 25 - 700mm

Note:

Can be supplied in a variety of diamond grades and widths. Also with 3 or 4 side spokes each side.

Normally supplied with 3 spokes each side. Larger sizes can be supplied with 4 spokes per side. Saws are made with bore sizes to suit customers' requirements which should be stated on order.

Saws coated in 36/44 grit are approximately 0.4mm wider than nominal width.



GULLETED SAWS

The gullets allow clearance and cool cutting. Ideal for fast aggressive cutting of sheets, pipes and all materials over 20mm thick.

OPTIONS: Diameters 100 - 700mm

NOTE:

Can be supplied in a variety of diamond grades and widths.

Normally saws are coated a minimum 3mm down the sides and are made with bore sizes to suit customers' requirements which should be stated on order.

Saws coated in 36/44 grit are approximately 0.4mm wider than nominal width.

Silent centre saws are available on request. These saws lower the level of noise produced.




OTHER RELATED PRODUCTS

HAND MACHINES - Pages 18-21

Technical Specification: Page 24

CUTTING

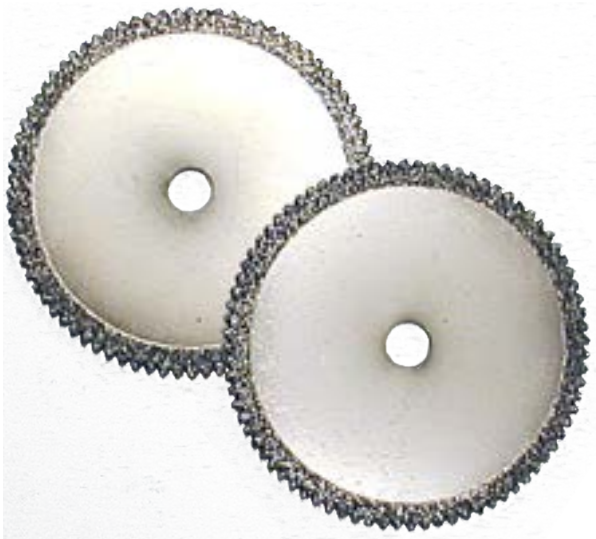

CORRUGATED TOOTHED SAW

Diamond coated 44/60 saw with serrated teeth for Kevlar®, Twaron® and Aramid fibres and also recommended for Carbon/Kevlar and Glass/Kevlar woven composite materials. The serrated teeth help to shear the fibre.

OPTIONS: Diameters 50 - 200mm

PYRAMID SAWS

For heavy duty hand trimming and sawing on GRP mouldings and other applications. Allows "side grinding " as well as cutting.

OPTIONS: Diameters 100, 125 & 230mm
 Grade 36/44

NOTE:

All saws are made with bore sizes to suit customers' requirements which should be stated when ordering.

Saws coated in 36/44 grit are approximately 0.4mm wider than nominal width.



SPINDLE ARBORS

Spindle Arbors are used to adapt any small diameter saw onto a shank to be held in a spindle collet on a routing, air tool (such as our SE20 or SE50) or CNC machine.

This is useful when trimming FRP/GRP and carbon composite parts.

We can manufacture Spindle Arbors in to any size required and also offer standard, off-the-shelf solutions.

OTHER RELATED PRODUCTS

HAND MACHINES - Pages 18 - 21

Technical Specification: Page 24

INTEGRAL SPINDLE SAWS



Used where it is necessary to cut close into a corner and where a boss or locking nut would get in the way. The blade and spindle are made in one piece and present an absolutely flush side to the work.

OPTIONS:

Diameters	25 - 75mm
Configuration	Continuous Rim Side Spoke

NOTE:

Can be supplied in a variety of diamond grades and widths.
All saws are coated a nominal 2mm down the sides. Please state shank diameter and length when ordering.

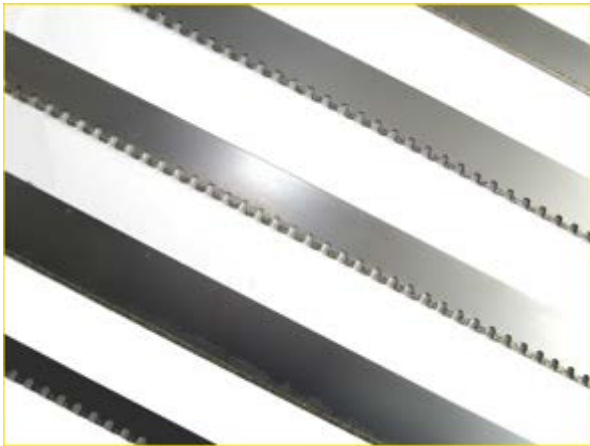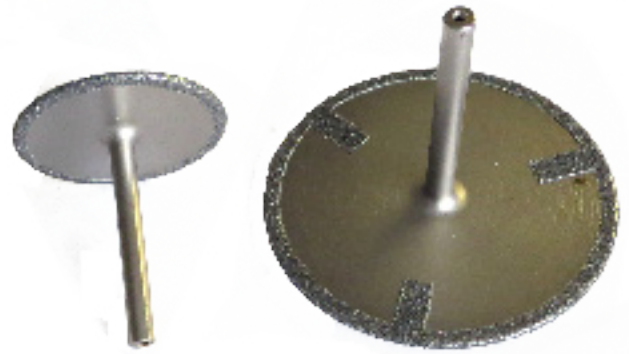

BANDSAW BLADES

Diamond coated bandsaws are made from high quality steel with the leading edge coated with diamond giving a continuous ribbon of aggressive cutting action. Both straight cut and curves can be easily achieved, bearing in mind the tighter the curve required, the narrower width of bandsaw needed.

Supplied ready welded to your exact required length or available in coils up to 39 metres long.

OPTIONS:

Continuous Coated
Castellated Edge (for thicker materials)
Blade Widths 12, 16, 19, 25mm

NOTE:

A Tension Gauge is also available.



JIGSAW BLADES

Diamond coated for free cutting with clean finish. Available for a range of machines in medium 44/60 or coarse 36/44 diamond.

OPTIONS:

Grades	36/44 coarse & 44/60 medium
--------	-----------------------------

NOTE:

Longer jigsaw blades available on request.

DRILLING

A wide selection of holesaws is available for both site and factory use when cutting holes in composites.



SPECIAL HOLESAWS

Special Holesaws are available to required specifications and sizes and can be manufactured as follows:

- **Automatic Side Ejection** – Provides a very rapid method of dry cutting holes in GRP mouldings and laminates.
- **Piloted with Spring-Operated Core Ejection** – Designed for diameters under 25 mm. Offers ease of location with core ejection via a spring-loaded plunger. Supplied with either an HSS/Tungsten Carbide drill or plain pilot.

- **Spring Core Ejection without Pilot** – Designed for holesaws with diameters over 25 mm where internal space is limited.

PLEASE NOTE: This type does not accommodate a standard internal spring plunger ejector. A spring-loaded centre is incorporated for location purposes and ejects the core upon completion of the hole.

Grade 36/44 available – prices on request.
Prices include plain or HSS pilot drills.



STANDARD HOLESAWS

(Various fittings available - Electroplated)

A range of holesaws coated in 36/44 diamond grit, that will rapidly cut through material leaving clean holes and giving long life.

OPTIONS: Diameters 14 - 152mm

NOTE:

Holesaws furnished without arbors unless specified. Standard drilling depths; with pilot and ejector spring 15mm, without pilot and ejector spring 30mm, For customers requiring deeper drilling depth, quotations will be given on request.

HOLESAWS ACCESSORIES

ARBORS

Chuck Size

9.5mm	Fits holesaw 14 - 30
13.0mm	Fits holesaw 32 - 152

PILOT DRILL

Tungsten Carbide Drill - Ø 6.5mm

EJECTOR SPRING

Ejects slug out of holesaw

A1 ARBOR



A2 ARBOR




Technical Specification: Page 24

METAL BOND DIAMOND CORE DRILLS

Heavy duty metal bond diamond segmented or crowned Core Drills for wet cutting clean holes in GRP/FRP containing high levels of Silicon.

NOTE: We can supply from 6mm to 700mm diameters, tube lengths and shank fittings to customer specification, please contact us.

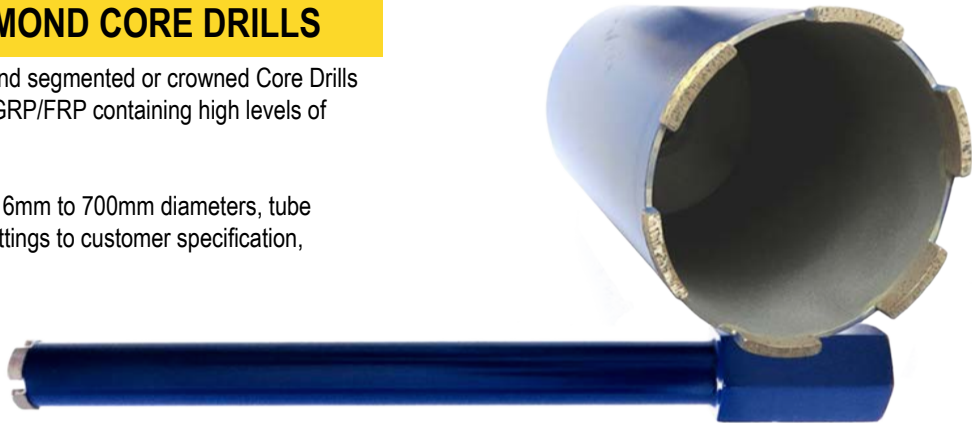


DIAGRIT WATER CHUCKS

TYPE A - Heavy duty water chuck fits most popular pillar drills clamping directly onto the quill of the drilling machine enabling waterfeed through the centre of core drills.

TYPE B - Very popular Water Chuck fits most popular pillar drills enabling waterfeed through the centre of core drills.

BABY WATER CHUCK - A unique small water chuck is an easy answer to supplying water coolant to the working area when drilling holes with a hand held pistol drill. Available with all types of shank fittings. For use with standard holesaws.

HEAVY DUTY WATER CHUCK - Please call for details on our Heavy Duty Water Chucks as we can design to your specification.

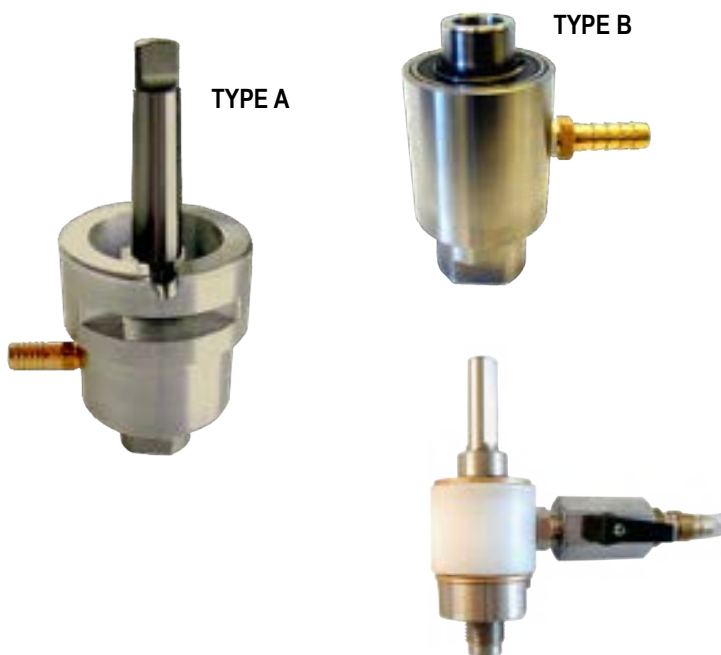

TYPE A

TYPE B

BABY WATER CHUCK

HEAVY DUTY WATER CHUCK

DIAGRIT WATER CHUCK - TYPE A

Continental 1/2" BSP fitting

NOTE: When ordering specify Morse taper size and quill diameter.

DIAGRIT WATER CHUCK - TYPE B

Continental 1/2" BSP or Habit fitting

NOTE: When ordering please specify Morse taper size.

BABY WATER CHUCK

Chuck complete with tap and pipe

NOTE: When ordering please specify required shank.

DIAGRIT HEAVY DUTY WATER CHUCK

1 1/4" UNC Fitting


Technical Specification: Page 24

DRILLING

DIAMOND MULTI-BORE TOOLS

The UK manufactured Diamond Multi Bore is a diamond coated cone tool used for the opening up of existing holes in composite materials, giving a clean hole with a smooth finish in any GRP or FRP materials.

The Diamond Multi-Bores are manufactured to order and are available in any size or diamond grade to suit your application. The diamond coated Multi-Bores can be used on any pneumatic handheld machines or automatic drilling machines.

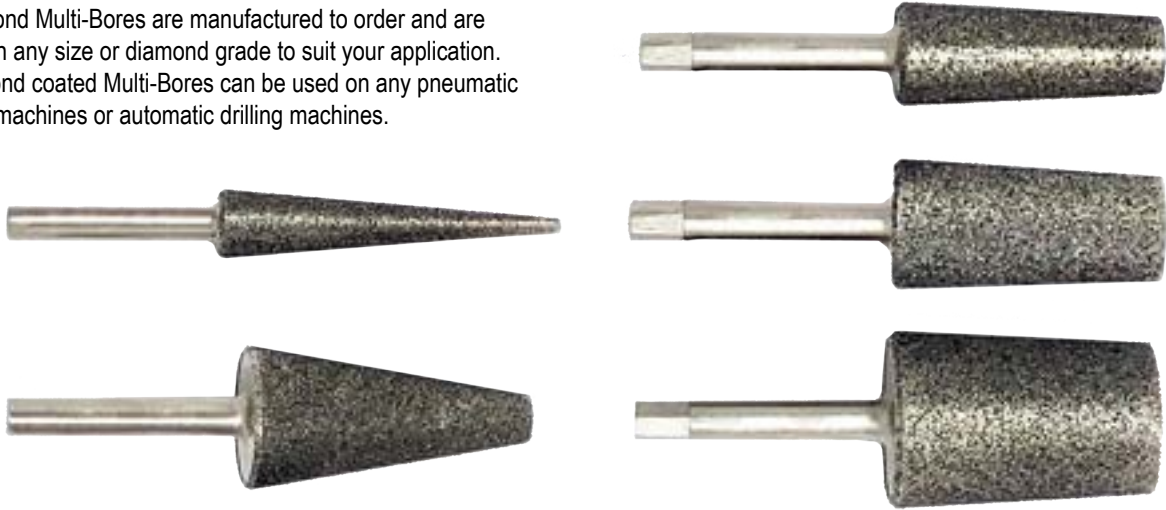

DIAMOND STEP PRO DRILL

The innovative Diamond Step Pro Drill offers many advantages over conventional drilling and cutting methods and can be used for various industrial applications in the Aviation, Marine and Motorsport industries.

The cone shape design allows various hole sizes to be drilled with just one tool, offering cost saving in the process. Additionally, the tool is available in different grit sizes to achieve various finishes as required.

The company's R&D department based this new innovative design on its tools already used for sheet metal and developed it in partnership with one of their customers.



TWIST DRILLS

OPTIONS:

Diameters 4 - 9.5mm

NOTE:

Other sizes and grades are available on request.
We also manufacture solid drills, details on request.



COUNTERBORES


OPTIONS:

Pilot 6, 8, 10, 16
Diameter 10 - 70mm

NOTE:

When ordering please state; Diameter, Pilot, Shank Diameter.

For holes up to 6mm diameter, these tools can be used in Series 50 or 20. Over 6mm diameter portable or fixed drilling machines can be used or static routing machines. Counterbores are not adjustable and must be ordered to cover both bore and recess, and can be manufactured to counterbore any size hole between 10mm and 50mm diameters.

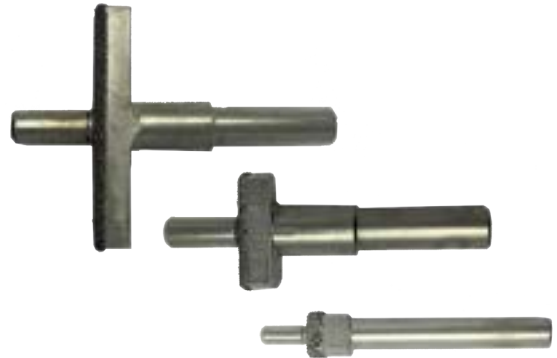

DIAMOND COUNTERSINKS

OPTIONS:




Diameters Type "A" 4 - 12mm
Type "C" 4 - 12mm
Type "D" 6.5 - 25mm

Grades 36/44 & 44/60

NOTE:

When ordering please state shank diameter.
Other sizes and grades are available on request.
Can be manufactured to your specification.

COUNTERSINKS - TYPE C

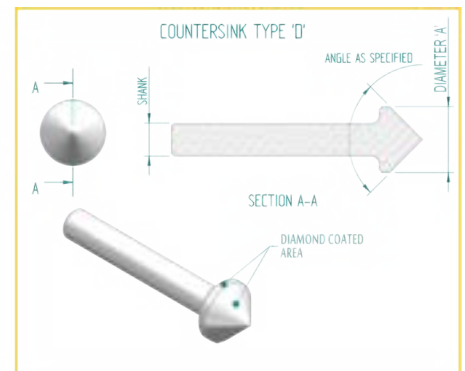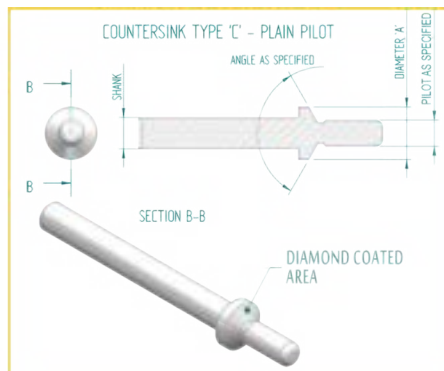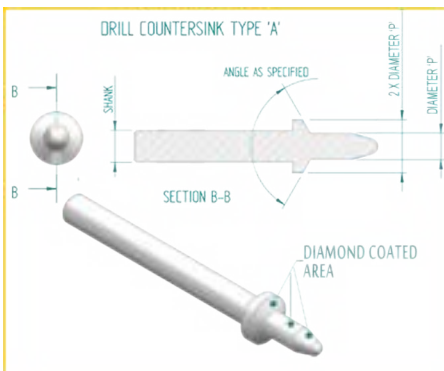

ROUTING

We offer a range of diamond routers to encompass the majority of applications in the GRP/FRP Composites Industry. The high quality routers are available in various sizes and diamond grades. We can also manufacture these routers to your specific requirements.

DOME ENDED ROUTERS


Designed for drilling, routing, rebating and trimming Glass Reinforced Plastic or similar materials. Developed to perform many different functions from trimming the unwanted section off fibreglass mouldings to routing deep rebates in laminates.

OPTIONS:


Type	Standard Coated to Shoulder
Diameters	From 4mm upwards to customer requirements
Shank Diameter	6mm, 8mm or to customer specification



STANDARD

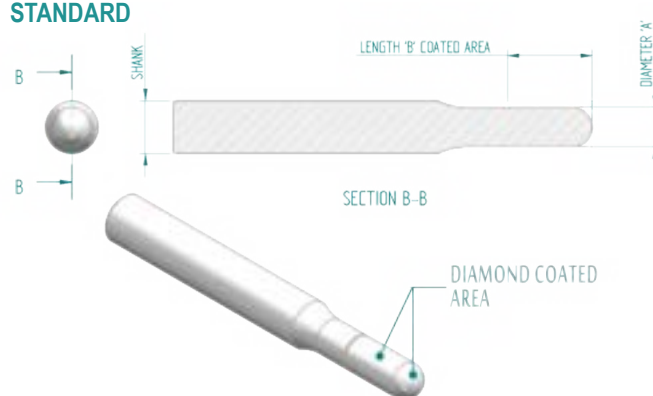

COATED TO SHOULDER

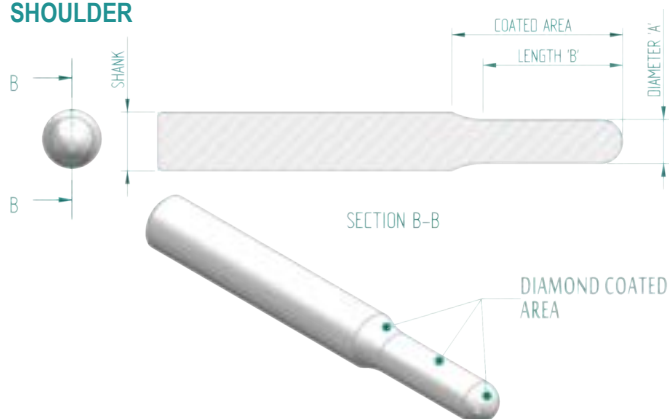

PARALLEL ROUTERS


Designed for drilling, routing, rebating and trimming Glass Reinforced Plastic or similar materials. Developed to perform many different functions from trimming the unwanted section off fibreglass mouldings to routing deep rebates in laminates and other materials.

OPTIONS:

Type	Flat End Relieved End
Diameters	4 - 25mm
Shank Diameter	6mm or to customer specification



RELIEVED END

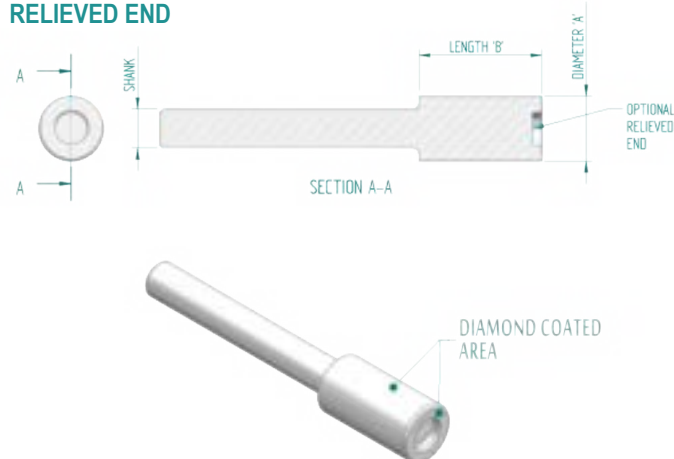

OTHER RELATED PRODUCTS

SE 50 ROUTER MACHINE - Page 19


Technical Specification: Page 24

PIERCING ROUTERS

Piercing routers or solid drills are usually used for drilling and routing Reinforced Plastic mouldings or laminate.

OPTIONS:

Diameter from 2mm upwards
Shank Diameter 6mm

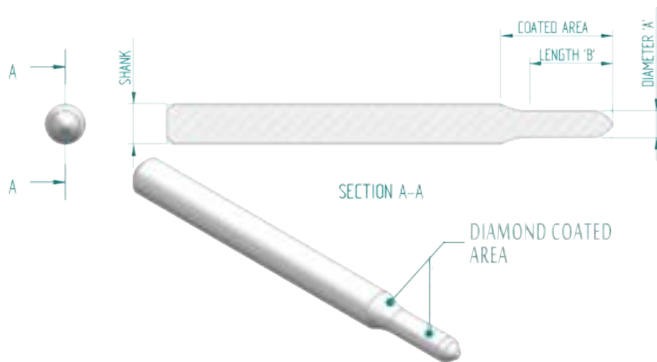


HI-DI ROUTER

Our diamond coated routers have been developed over the years to perform many varied functions from trimming unwanted section off fibreglass mouldings to routing deep rebates in laminates of all kinds.

OPTIONS:

Diameter Top 3.5mm to point
Shank Diameter 6mm

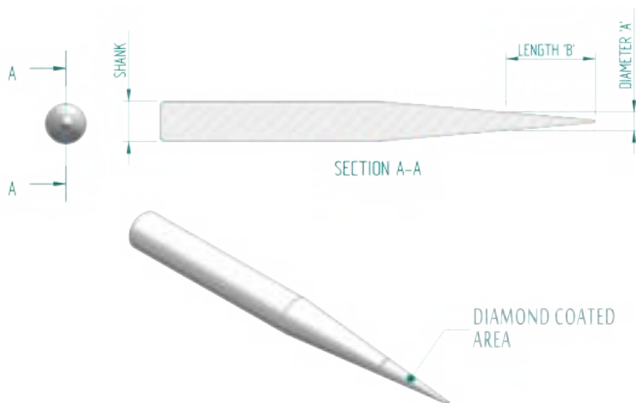


GRASSO ROUTER

Small diameter router for intricate work on Composite and similar materials.

OPTIONS:

Diameter 3.5mm
Shank Diameter 3mm

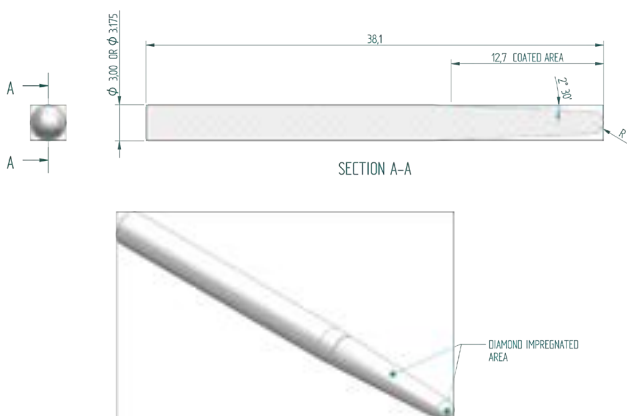

OTHER RELATED PRODUCTS

SE 50 ROUTER MACHINE - Page 19

Technical Specification: Page 24

GRINDING

We are able to supply grinding tools to cover the majority of grinding applications in the Composite industry.



ELECTROPLATED DIA-DRY DISCS

Designed to provide a rapid continuous grinding of Reinforced Plastic and similar materials, with long life.

Made for dry use but can be used wet.

Recommended speed 8,000 to 12,000 rpm.

OPTIONS:

Diameters	100, 180mm
Fitting	16mm, 22.2mm or M14
Grades	36/44, 44/60 & 60/85



TITAN DRY GRINDING DISCS

Developed with vacuum brazed diamond for rapid stock removal.

OPTIONS:

Diameters	115mm & 178mm
Bore	22.2mm
Grade	40

NOTE:

Fits directly onto an angle grinder.

OTHER RELATED PRODUCTS

AS100 ANGLE GRINDER MACHINE - Page 21


Technical Specification: Page 24

SURFACE PLANERS

Designed to be used in a heavy duty routing machine for machining flat surfaces on Reinforced Plastic mouldings or blocks of laminate. The cutting edge is castellated to facilitate removal of swarf from the cutting face. Standard grade 44/60, for rapid stock removal 36/44 or 30/36 for abrasive materials.

OPTIONS:

Diameters 40 - 75mm standard or to customer specification

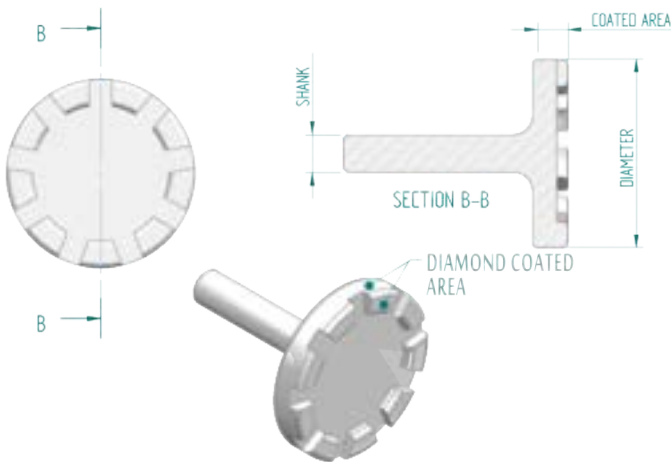


VORTEX CUTTERS

The ideal tool for opening up, elongating and machining oval holes.

OPTIONS:

Diameters 25 - 75mm standard or to customer specification.

Alternative sizes can be manufactured in both parallel or tapered types.

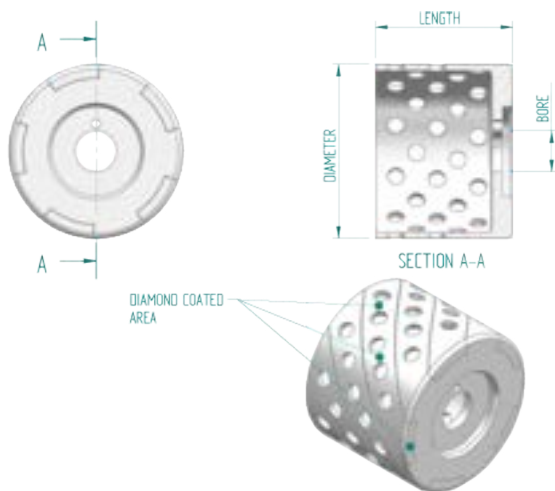

GRINDING

NEEDLE FILES

A full range of quality electroplated diamond coated needle files is available in the most popular shapes and grits 85/100, 120/150 and 200/240.

TYPE NO. CODE GRIT SIZE DESCRIPTION

Tapered

TF1	ENF020	120/150	Taper Flat
TF3	ENF080	120/150	3 Square
TF5	ENF140	120/150	Square
TF6	ENF170	120/150	Round
TF9	ENF260	120/150	Half Round

Parallel

PF10	ENF290	120/150	Hand
------	--------	---------	------

Handle

	Taper Flat		Round
	3 Square		Half Round
	Square		Hand (Parallel)



ELECTROFLEX HAND FILES

General purpose files supplied in sets of 4 different profiles.

OPTIONS:

Size	155mm Overall length.
Metal Grades	Black M120, Red M200, Yellow M400 & White M800 grit



CUSHIONED FLEXIBLE HAND PADS

Electroflex hand pads are Ideal for smoothing the edge of Reinforced Plastic moulding. Shaped foamed backing for comfortable grip. Colour coded foam backing for easy grade identification.

OPTIONS:

Size	90 x 55 mm & 100 x 55 mm
Metal Grades	Black M120, Red M200, Yellow M400 & White M800 grit



DIA-MET HAND PADS

A rigid hand pad with aggressive stock removal for hand grinding reinforced plastic and similar materials.

OPTIONS:

Size	—	95 x 55mm
Grades	—	Green M60, Black M120, Red M200



GRINDING



NARROW DIAMOND BELTS

Designed for dry grinding and deburring reinforced plastic and similar materials.

OPTIONS:

Size

Length 305 x 13mm wide &

Length 610 x 13mm wide

Metal Grades

Black M120, Red M200,

Yellow M400 & White M800 grit



ELECTROFLEX FEIN TRIANGLE PADS

Used for removing sharp edges, arrising and bevelling. These pads have a quick release backing (QRS) for rapid change. Available in various sizes with or without water holes.

OPTIONS:

Metal Grades

Black M120, Red M200,

Yellow M400 & White M800 grit



ELECTROFLEX DRUMS

M14 Drums with central waterfeed for wet polishing.

OPTIONS:

Size

Ø50 x 42mm Wide

Ø75 x 50mm Wide

Metal Grades

Black M120, Red M200,

Yellow M400 & White M800 grit

Technical Specification: Page 24

GRINDING

QRS BACKING DISCS (VELCRO™)

Quick release discs for grinding Reinforced Plastic and similar materials. Colour coded for easy grade identification.

Sizes Ø100mm & Ø125mm

Metal Grades Black M120, Red M200,
Yellow M400 & White M800 grit



QRS BACKUP PADS

Backing pads for Ø100mm QRS discs. Flat and Cushioned types available with M14 fitting.

Sizes Ø100mm & Ø125mm

ELECTROFLEX BACKED DISCS

The M14 discs are used wet for rapid grinding.

Size Ø100mm

Metal Grades Black M120, Red M200,
Yellow M400 & White M800 grit



D-LOC DISCS

Quick release discs for grinding Composites. Colour coded for easy grade identification.

OPTIONS:

Diameter 25, 50 & 75 mm

Metal Grades Black M120, Red M200,
Yellow M400 & White M800 grit

D-LOC MANDRELS

Quick release backup pads and shaft for D-Loc Discs.

OPTIONS:

Diameter 25, 50 & 75 mm




Technical Specification: Page 24

SPECIALS

SPECIAL TOOLS

We are specialists in designing and manufacturing special tools for many applications. For example, we are renowned for a large range of calibration wheels, drills, saws, routers, holesaws etc. specifically for the GRP/FRP Pipe Industry and also for the Wind Turbine Industry.

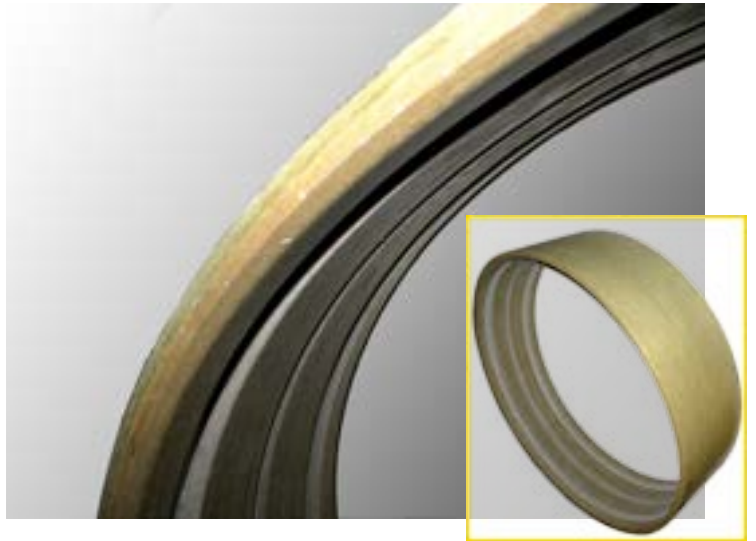

GRP/GRE PIPES

We supply a range of standard tools manufactured in the United Kingdom as well as bespoke tooling for individual requirements. These tools can be used for both Continuous/Discontinuous Filament Wound Pipe and Centrifugal Cast Pipe.

We also hold a large stock for immediate despatch of Reka Coupling, Locking Bell and Spigot Joint tooling, Online and Offline Calibration Drums and Threading wheels.



WIND TURBINE INDUSTRY

As one of the world's leading manufacturers of diamond tooling for the production of Wind Turbine parts, we can supply range of holesaws up to 950mm in diameter, surface planers and large diameter saws of up to 700mm for blade root trimming, all manufactured in the United Kingdom. All of these tools are available in various diamond grades to suit your specific application.

We also offer a **Design - Manufacture - Supply** service for all of your special tools. Please contact our Technical Sales Engineers to discuss your requirements.

Additionally to the above, the team can also offer a strip, replate and retipping service for your used electroplated and metal bond tools. This could save you up to 40% on your tooling costs.



HAND MACHINES

AIR POWERED MACHINES


SE20 TRIMMING MACHINE

This robust lightweight powerful hand machine has been developed for rebating and sawing materials up to 12mm thick. The design of the machine allows it to be easily adapted for jig following and can also be bench or pedestal mounted. The machine is supplied with a safety guard and includes a safety lever throttle.

NOTE:

For ROUTING — 6 or 8mm routers can be used and when used with a collet nut adaptor the machine will drive a 65mm diameter saw.

For TRIMMING — trimming can be carried out by using a 6mm router but the SE50 is more suited for this purpose.

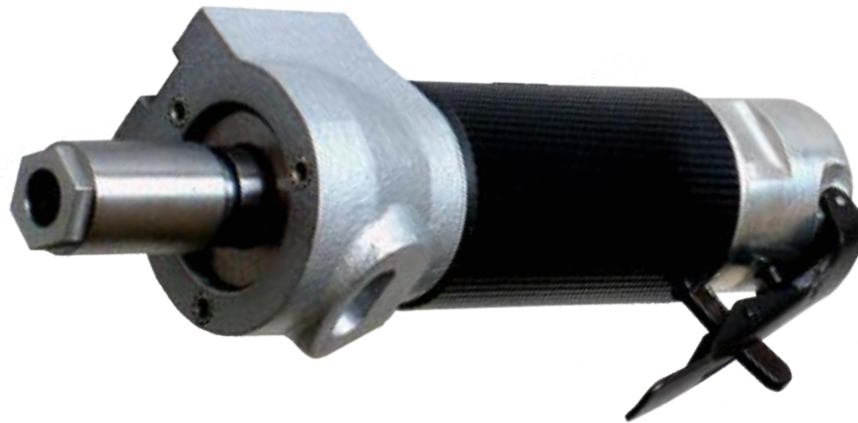

OPTIONAL ATTACHMENTS


REBATING ATTACHMENT AND GAUGE

When used with a standard 19 x 35mm rebating router the adjustable guide allows a large range of rebates to be machined quickly and economically.



JIG TRIMMING GUIDE AND GAUGE

When used with a 40mm diameter side spoke saw this unit allows for precision trimming to be carried out by following a jig with the roller guides and adjusting width of cut as required.

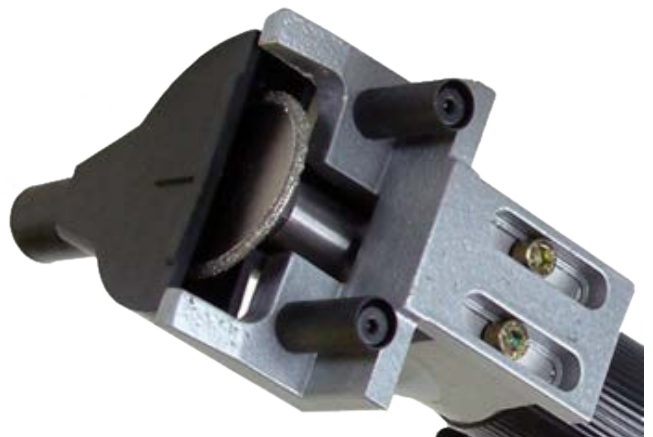

Technical Specification: Page 25

HAND MACHINES

SE50 ROUTING MACHINE

The high speed air powered machine has been designed principally to be used in conjunction with our diamond coated saws and routers for trimming Reinforced Plastic mouldings up to 3mm thick using saws up to 40mm diameter, either freehand or following a jig. The machine incorporates an auxiliary sleeve which can be easily removed for rapid change of tooling and will accept routers up to 6mm diameter. The machine is supplied with a plain nose cowl and includes a safety lever throttle.

NOTE:

The SE50 has a side exhaust. The supplied plain nose cowl which can be used as a jig guide also protects both collet and router shank from abrasion.



QUICK Q-6R PNEUMATIC WET POLISHER

Variable speed grinder with central water feed and rear exhaust. M14 fitting.



AS70 ANGLE SAW

The AS70 is a very powerful lightweight machine fitted with an open saw guard and efficient dust extraction.

The narrow head on the AS70 enables machining to be carried out in tight corners up to 12mm thick. Spent air is exhausted through the handle preventing the material being contaminated by airborne particles. Supplied with safety lever throttle, hose, oil etc.

NOTE:

Recommended Saws

Side Spoke Saw 44/60 grit, Ø70mm x 1.6mm x 16mm



Technical Specification: Page 39

HAND MACHINES

AS100 ANGLE SAW

The AS100 is a very powerful robust machine developing 1.5 HP. Fast cutting, with very effective dust extraction, of Reinforced Plastic up to 25mm thick using a 100mm diameter side spoke saw. Supplied with a combined saw guard and dust extraction cowl and safety lever throttle.

NOTE:

Recommended Saws

Side Spoke or Continuous Rim

44/60 grit, 100mm x 1.6mm x 15.875mm



AS125 ANGLE SAW

The AS125 has the same power and specifications as the AS100. It has been designed to accept larger diameter saws for applications requiring a greater depth of cut. Will cut laminate up to 25mm thick or corrugated sheeting up to 40mm. Supplied as standard with safety lever throttle.

NOTE:

Recommended Saws

Side Spoke or Continuous Rim

44/60 grit, 125mm x 1.6mm x 15.875mm



OPTIONAL ATTACHMENTS

SOLE PLATE WITH ADJUSTABLE DEPTH GAUGE

A sole plate with adjustable depth gauge is available providing precise cutting depth of up to 35mm.

AS100 ANGLE GRINDER

Very powerful, heavy duty machine developing 1.5HP. Used for rapid grinding of Reinforced Plastic with a 100mm diameter Dia-Dry disc. The machine is supplied with a combined guard and dust extraction cowl and with safety lever throttle.

NOTE:

Recommended Disc

Ø100mm Dia-Dry 36/44 & 44/60



Technical Specification: Page 25

HAND MACHINES


AIR BELT POLISHERS

Diamond belt machine with Locklever for grinding, deburring and polishing difficult to reach areas. With 7° offset and rear exhaust.

MODEL 14000



MODEL 15003

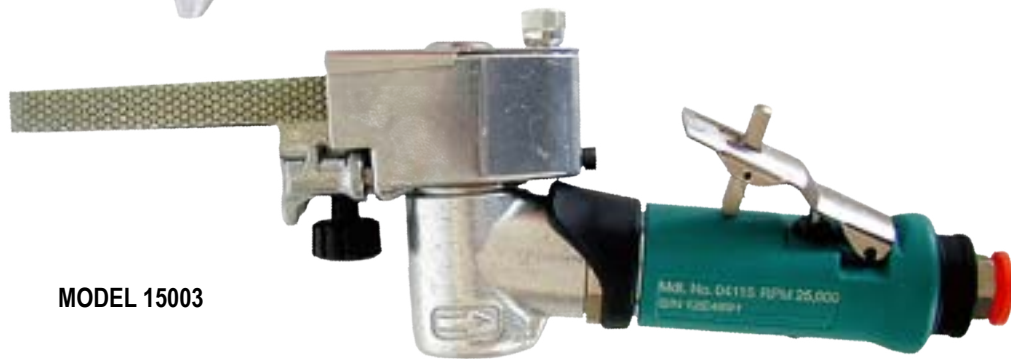

ELECTRIC MACHINE

FEIN MULTIMASTER MM 700

The Fein Multimaster MM 700 is used for dry polishing.
Speed variable 10,000 - 19,500

FEIN BACKUP PADS

QRS backing pad (box of 2)



Technical Specification: Page 25

ACCESSORIES




AIR PREPARATION MINI FILTER/
REGULATOR AND LUBRICATOR

OIL MIST LUBRICATOR

FOR USE WITH AIR MACHINES

Air preparation mini filter/regulator and lubricator which filters air and water. The lubricator oil can be replenished without stopping the air line and oil delivery in a perfect mist, ensuring good lubrication to the working parts of the air power tool for maximum efficiency and long life. The semi-automatic drain filter bowl with high quality polycarbonate bowl is designed for long service life.

*BMP032	Mini	55 cu. ft./min
		1650 litre/min
*MMPL10	Hydrasil 10 Lubrication Oil ½L	

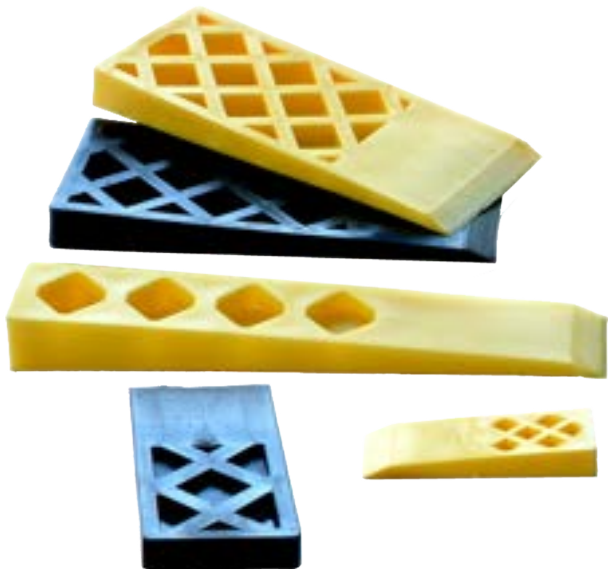

PLASTIC WEDGES

Plastic wedges are used for separating Reinforced Plastic “lay ups” from the mould. These wedges are manufactured to provide an ideal and professional method for demoulding the finished lay up without causing damage to the “Gel Coat”.

OPTIONS:

Sizes	175mm x 75mm, 130mm x 55mm 100mm x 38mm, 215mm x 38mm
Rigid	Yellow - used for flat moulds
Flexible	Black - used for curved moulds

STRIP, RE-PLATE & RE-TIP SERVICE

We offer a strip and replate service for your used electroplated tools, this could save you up to 40% on your tooling costs.
Please ask us for a quotation.

BEFORE




STRIP & REPLATE SERVICE AVAILABLE FOR:

- Continuous Rim Blades
- Flute Wheels
- Profile Wheels
- Parallel Routers
- Various Electroplated CNC Tooling

RE-TIP SERVICE AVAILABLE FOR :

- Multicut Core Drills
- Milling Wheels
- Routers (Metal Bond)
- Drums

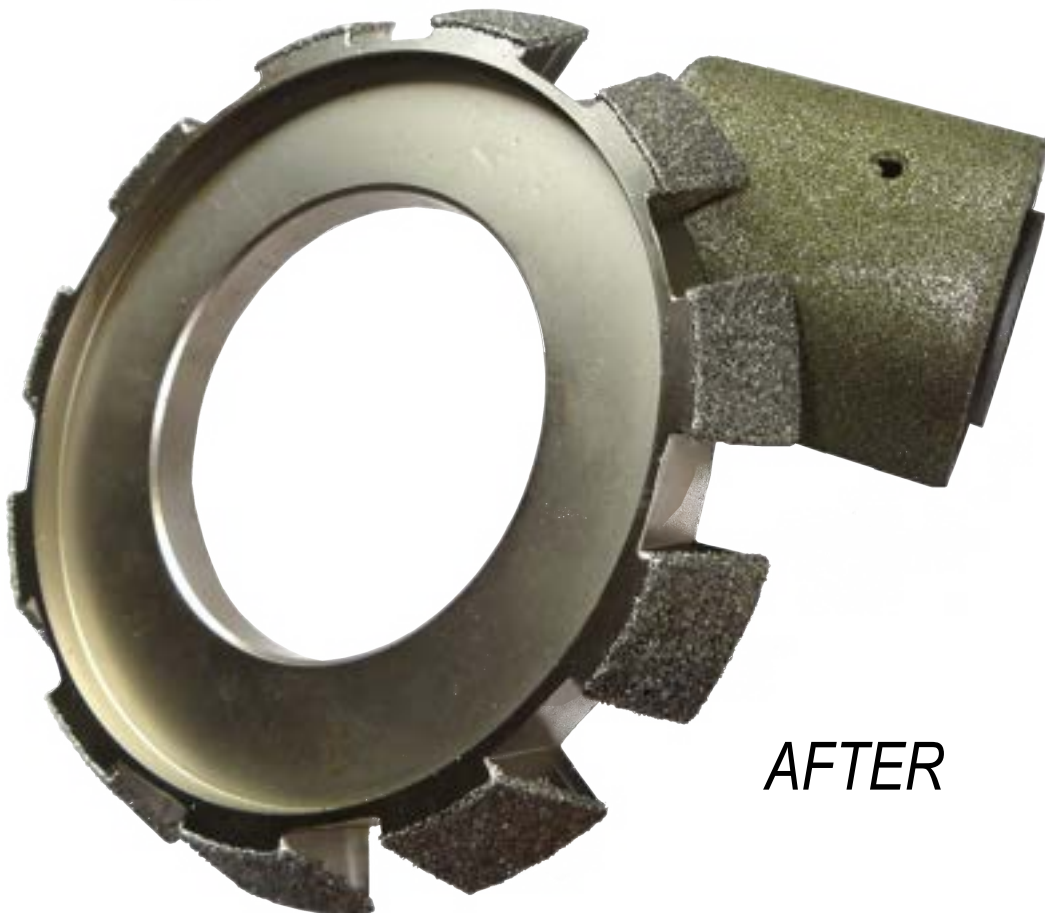

AFTER

TECHNICAL SPECIFICATION

SAW BLADES - PAGES 2 - 3

SURFACE SPEED	
1,500 - 3,000 m/min	25 - 50 m/sec

SPINDLE SAWS - PAGE 3

SURFACE SPEED	
1,500 - 3,000 m/min	25 - 50 m/sec

OSCILLATING BLADES - PAGE 4

STROKES
11,000 - 18,500 / min

BANDSAW BLADES - PAGE 4

TENSION	MOS
1,050 - 1,400 kg/cm ²	1,400 m/min - 1,800 m/min

JIGSAW BLADES - PAGE 4

STROKES
1,900 - 2,400 / min

ELECTROPLATED HOLESAWS - PAGE 5

DIAMETER	RPM
14-20mm	2,500
22-38mm	2,000
40-60mm	1,500
65-85mm	1,000
90-150mm	500

METAL BOND CORE DRILLS - PAGE 6

DIAMETER	RPM
12-20mm	3,300 - 2,000
23-39mm	1,740 - 1,030
40-60mm	1,000 - 670
62-89mm	650 - 450

DIAMOND TWIST DRILLS - PAGE 7

DIAMETER	RPM
4mm	2,500
9.5mm	1,500

DIAMOND COUNTERBORES - PAGE 7

DIAMETER	RPM
4mm	2,500
9.5mm	1,500

DIAMOND COUNTERSINKS - PAGE 7

DIAMETER	RPM
4mm	2,500
9.5mm	1,500

ELECTROPLATED ROUTERS - PAGES 8 - 9

DIAMETER	SURFACE SPEED	SPEED RANGE
6mm	8-16 m/sec	25,500 - 50,000 rpm
8mm	8-21 m/sec	20,000 - 50,000 rpm
10mm	8-16 m/sec	15,300 - 30,000 rpm
12mm	8-16 m/sec	12,700 - 25,000 rpm
16mm	8-16 m/sec	8,550 - 19,100 rpm
19mm	8-16 m/sec	8,050 - 16,100 rpm
25mm	8-16 m/sec	6,110 - 12,225 rpm

DIA DRY DISCS - PAGE 10

DIAMETER	RPM
100mm	12,000
180mm	8,500

TITAN DISCS - PAGE 10

DIAMETER	RPM
100mm	12,000
180mm	8,500

SURFACE PLANERS - PAGE 11

DIAMETER	SURFACE SPEED	SPEED RANGE
30mm	25-31 m/sec	16,550 - 20,000 rpm
40mm	25-42 m/sec	12,000 - 20,000 rpm
50mm	25-52 m/sec	10,000 - 20,000 rpm
65mm	25-50 m/sec	7,350 - 14,700 rpm
75mm	20-50 m/sec	5,000 - 12,730 rpm

VORTEX CUTTERS - PAGE 11

DIAMETER	SURFACE SPEED	SPEED RANGE
25mm	8-31 m/sec	6,000 - 23,700 rpm
50mm	16-31 m/sec	6,000 - 12,000 rpm
75mm	16-39 m/sec	4,000 - 10,000 rpm

ELECTROFLEX DRUMS - PAGE 14

POLISHING	MOS
Wet	3,600 rpm

FLEXIBLE DISCS & PADS - PAGES 15

Refer to machine manufacturers recommendations for speeds.
--

TECHNICAL SPECIFICATION

SE20 TRIMMING MACHINE - PAGE 18

COLLET DIAMETER	MAX. HOSE DIAMETER	MAX. SAW DIAMETER	WEIGHT
mm 6 or 8	internal/dia. mm 10	mm 75	kg 0.91
FREE SPEED	AIR PRESSURE	AIR CONSUMPTION	
rpm 20,000	PSI BAR 100 6.9	litre/min 425	

SE50 ROUTING MACHINE - PAGE 19

COLLET DIAMETER	MAX. HOSE DIAMETER	MAX. SAW DIAMETER	WEIGHT
mm 6	internal/dia. mm 6	mm 50	kg 1.14
FREE SPEED	AIR PRESSURE	AIR CONSUMPTION	
rpm 72,000	PSI BAR 100 6.9	litre/min 340	

Q6-R PNEUMATIC WET POLISHER - PAGE 19

WEIGHT	FREE RUNNING SPEED	AIR PRESSURE
1.2 kg	0-3500 rpm	15 cfm @ 90 psi

AS70 ANGLE SAW - PAGE 19

MIN. HOSE DIAMETER	MAX. SAW DIAMETER	WEIGHT
internal/dia. mm 10	mm 70	kg 0.9
FREE SPEED	AIR PRESSURE	AIR CONSUMPTION
rpm 12,000	PSI BAR 100 6.9	litre/min 536

AS100 ANGLE SAW - PAGE 20

MIN. HOSE DIAMETER	MAX. SAW DIAMETER	WEIGHT
internal/dia. mm 10	mm 100	kg 1.68
FREE SPEED	AIR PRESSURE	AIR CONSUMPTION
rpm 12,700	PSI BAR 100 6.9	litre/min 565

AS125 ANGLE SAW - PAGE 20

MIN. HOSE DIAMETER	MAX. SAW DIAMETER	WEIGHT
internal/dia. mm 10	mm 125	kg 2.25
FREE SPEED	AIR PRESSURE	AIR CONSUMPTION
rpm 12,700	PSI BAR 100 6.9	litre/min 565

AS100 ANGLE GRINDER - PAGE 20

MIN. HOSE DIAMETER	MAX. SAW DIAMETER	WEIGHT
internal/dia. mm 10	mm 100	kg 1.68
FREE SPEED	AIR PRESSURE	AIR CONSUMPTION
rpm 12,700	PSI BAR 100 6.9	litre/min 565

AIR BELT POLISHERS - PAGE 21

WEIGHT	MODEL	AIR FLOW SCFM (LPM)	MOTOR hp	SPEED
0.82 kg	15003	20 (556)	.4	25,000 rpm max.
1.4 kg	14000	31 (878)	.5	20,000 rpm max.

FEIN MULTIMASTER MM 700 - PAGE 21

WEIGHT	SPEED	VOLTAGE
1.9 kg	Variable 10,000 - 19,500	110

OIL MIST LUBRICATOR - PAGE 22


Compact size up to 1650 litres/minute 55 cfm air flow ¼" BSP fittings.


Operating pressure range 0.5-8.0kgf/cm² 0.5-7-114 PSI. Effective water and particle removal 5µm filter elements. Operating temperature range 10°-60° (14-140F).

Recommended oil type ISO-VG32 the 4-6 drops per minute is adjusted by screwdriver to prevent unintentional oil volume adjustment.

The Technical Specification information is for guidance only, assuming your machine/tools are in serviceable condition and have been maintained to the manufacturer's specification.

For further technical information, please contact us.

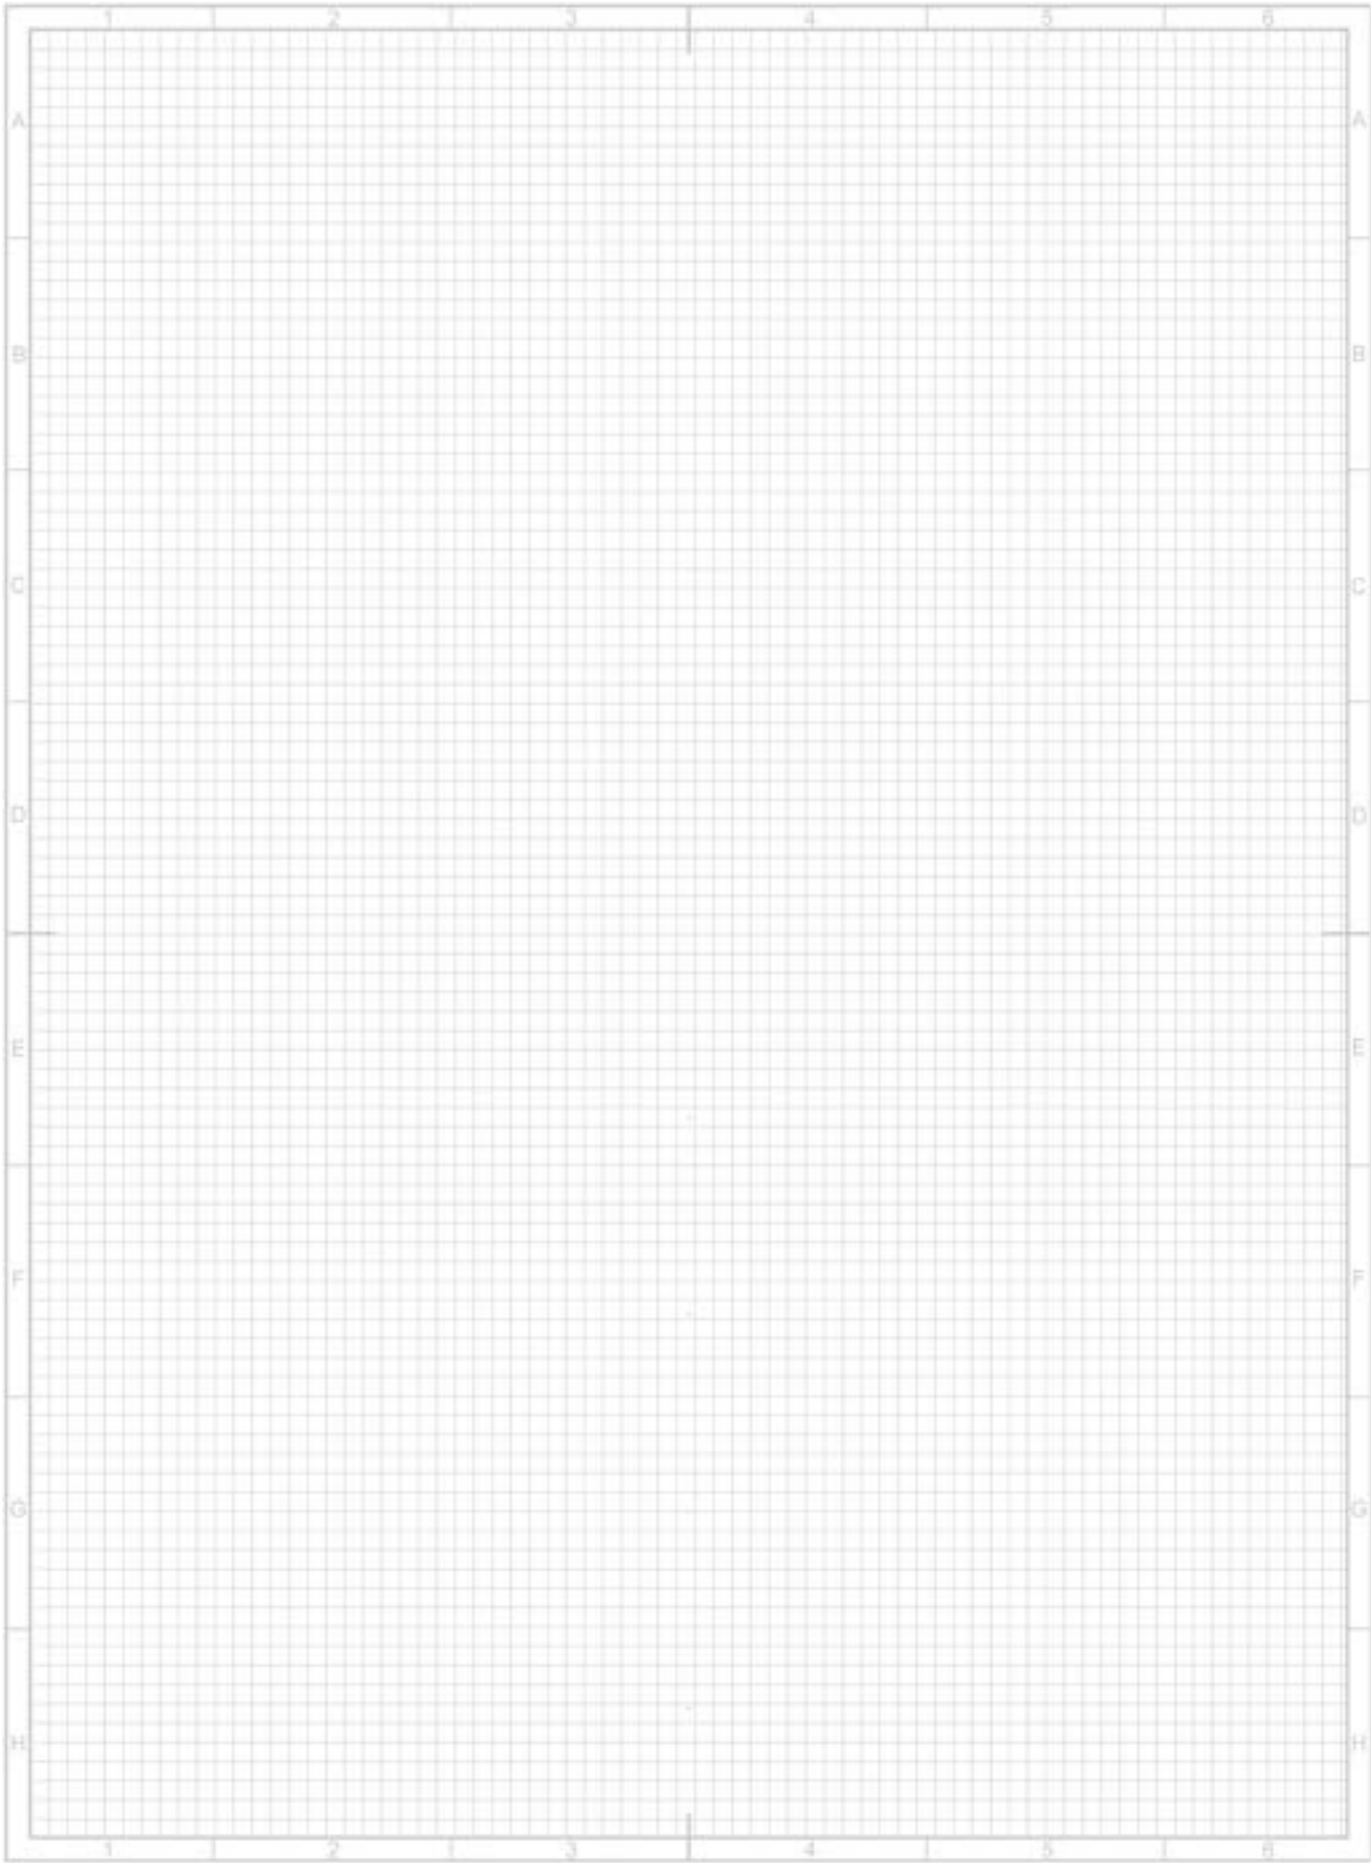

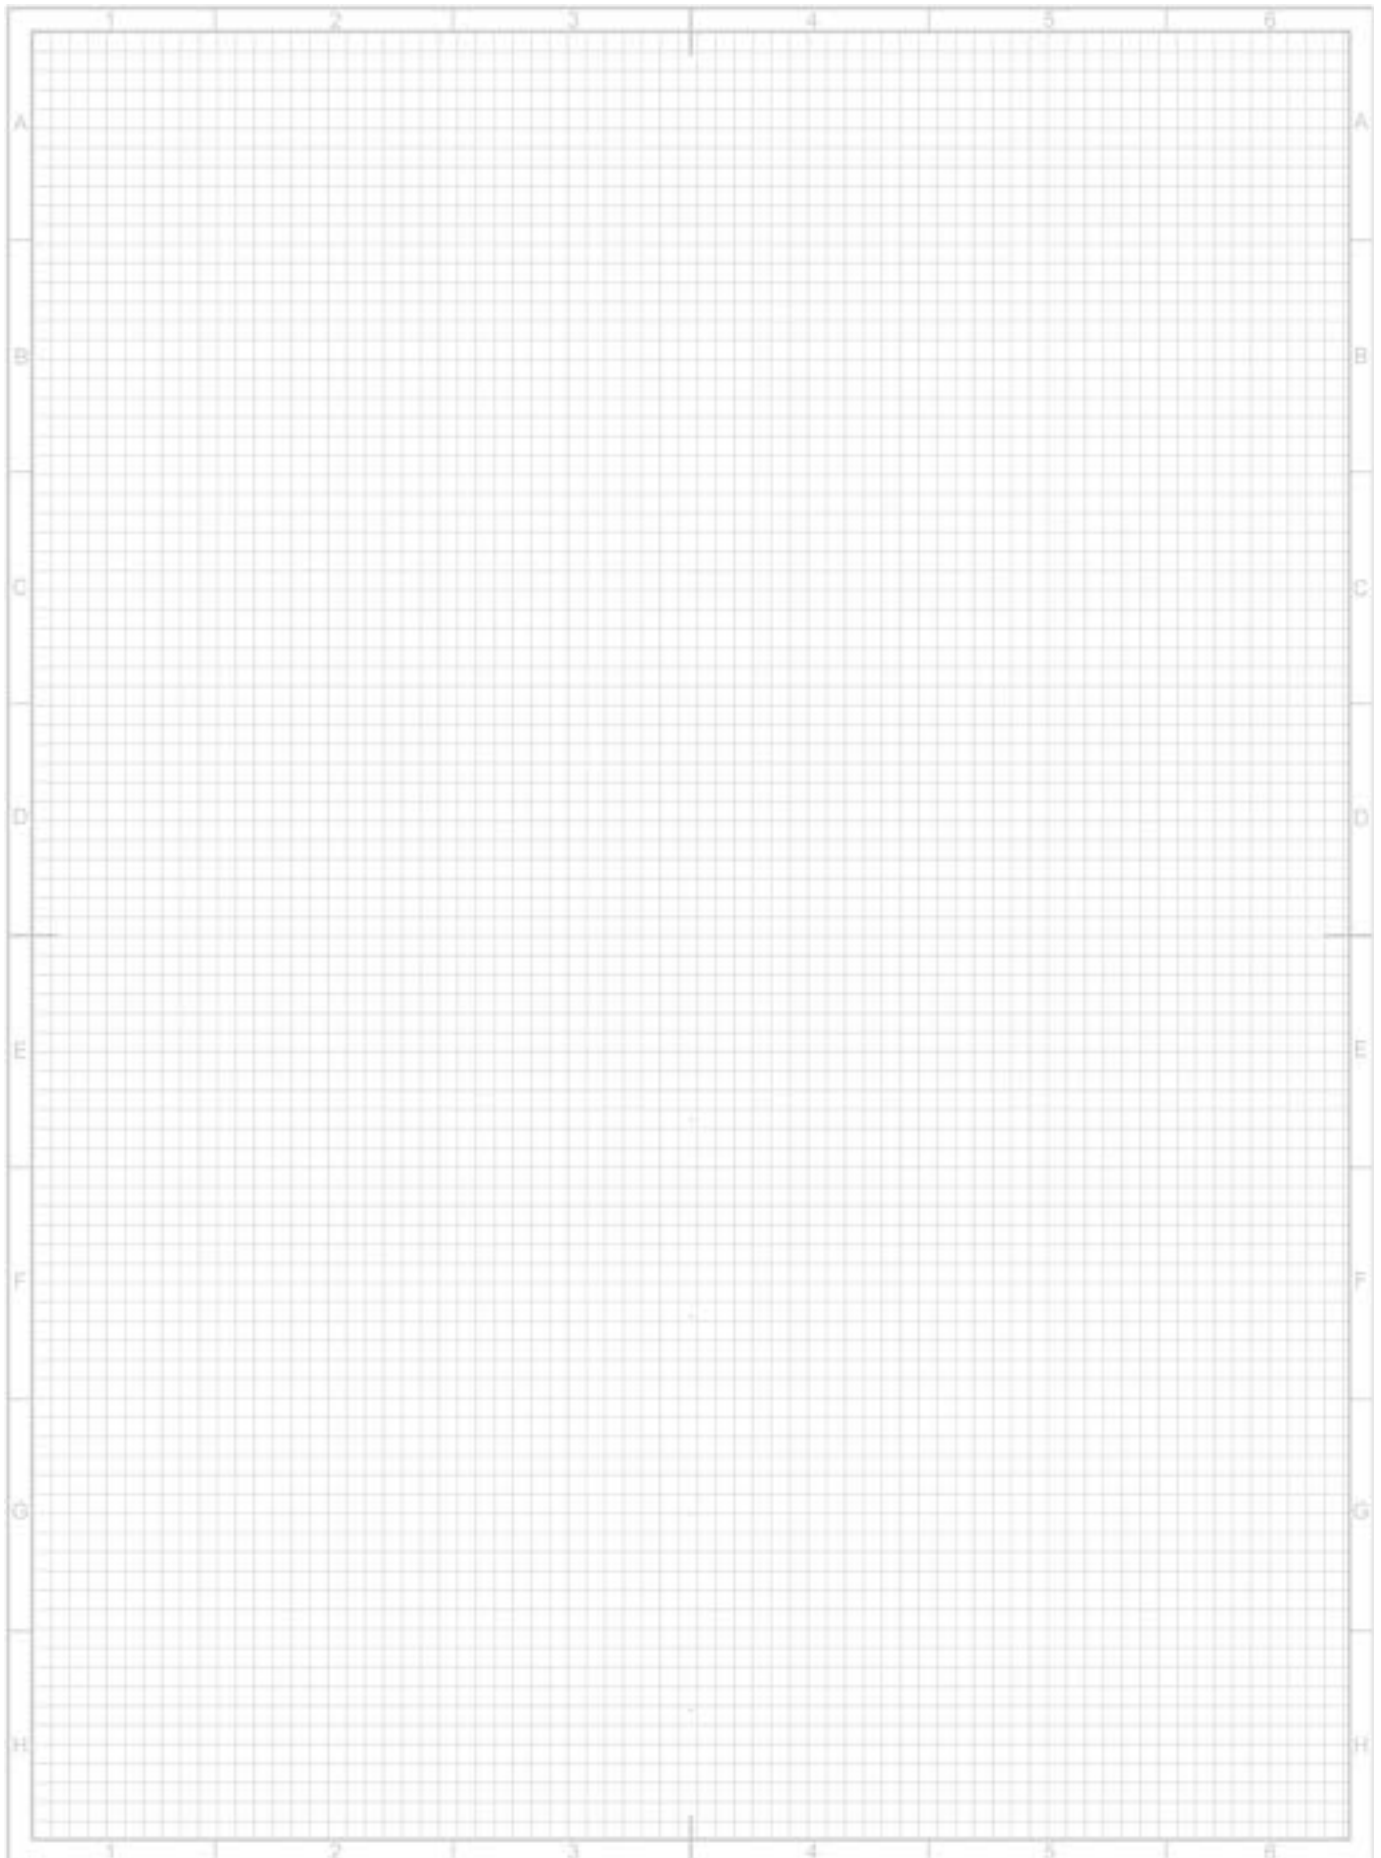

BÜFA Composites Nordics OY

Kalevankatu 6, 3. krs, 00100 Helsinki
email: nordicsales@buefa.de
web: www.buefa.ee
Finland: +358 505 367 733
Sweden/Norway: +46 70 307 4432

BÜFA Composites Baltic OÜ

Kõrtsi tee 9, 75306 Lehmja
email office@buefa.ee
Web: www.buefa.ee
Estonia: +372 5388 2295
Latvia/Lithuania: +370 614 95 949